

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2001 (01.02.2001)


PCT

(10) International Publication Number
WO 01/08439 A1

- (51) International Patent Classification⁷: **H04Q 7/38** (74) Agents: **WADSWORTH, Philip, R. et al.**; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (21) International Application Number: **PCT/US00/19907**
- (22) International Filing Date: **20 July 2000 (20.07.2000)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/358,634 **21 July 1999 (21.07.1999)** **US** (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: **QUALCOMM INCORPORATED [US/US]**;
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (72) Inventors: **JOU, Yu-Cheun**; 9979 Riverhead Drive, San Diego, CA 92129 (US). **TIEDEMANN, Edward, G., Jr.**; 4350 Bromfield Avenue, San Diego, CA 92122 (US).
- Published:
— *With international search report.*

[Continued on next page]

(54) Title: **MOBILE STATION SUPERVISION OF THE FORWARD DEDICATED CONTROL CHANNEL WHEN IN THE DISCONTINUOUS TRANSMISSION MODE**

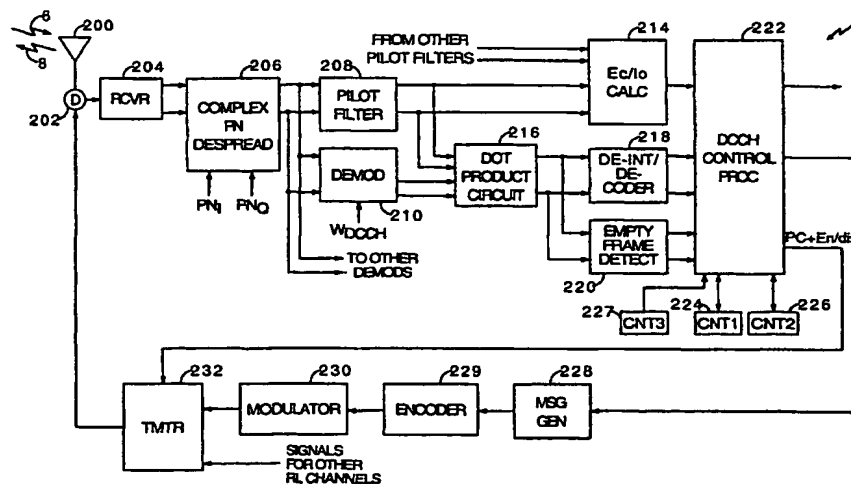

(57) Abstract: A method and apparatus for supervising a dedicated control channel when in the discontinuous transmission mode. The mobile station (4) monitors the frames it receives from a base station (2) and maintains a counter of bad, good, and empty frames, referred to as COUNT1, COUNT2, COUNT3, respectively. If a received frame is a good frame, COUNT1 is reset to zero and COUNT2 is incremented. If the received frame is a bad frame, COUNT1 is incremented and COUNT2 is reset to zero. If the received frame is an empty frame, COUNT1 and COUNT2 are unchanged but COUNT3 is incremented. A transmitter coupled to the mobile station is enabled or disabled depending upon which, if any, of the COUNTs reaches or exceeds a designated threshold value.

WO 01/08439 A1

WO 01/08439 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**MOBILE STATION SUPERVISION OF THE FORWARD
DEDICATED CONTROL CHANNEL WHEN IN THE
DISCONTINUOUS TRANSMISSION MODE**

5 **BACKGROUND OF THE INVENTION**

I. Field of the Invention

10 The present invention relates to communications. More particularly,
the present invention relates to a method and apparatus for supervising a
control channel used in a telecommunications system.

II. Description of the Related Art

15 The telecommunications Industry Association developed a standard
for code division multiple access (CDMA) communications systems in the
Interim Standard IS-95A, entitled "Mobile Station-Base Station
Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular
System" (hereafter IS-95). In IS-95 systems, the mobile station controls the
20 energy of its transmissions by means of a combination of open loop and
closed loop power control methods. In open loop power control, a mobile
station measures the received energy of the forward link signal from a
serving base station and adjusts the energy of its reverse link transmission
in accordance with this measurement. In closed loop power control, the
25 serving base station measures the energy of transmissions from the mobile
station and sends a series of up/down commands based on this
measurement to the mobile station which adjusts its transmissions in
response. A power control system employing closed loop and open loop
power control is described in U.S. Patent No. 5,056,109, entitled "METHOD
30 AND APPARATUS FOR CONTROLLING TRANSMISSION POWER IN A
CDMA CELLULAR MOBILE TELEPHONE SYSTEM", assigned to the
assignee of the present invention and incorporated by reference herein.

In IS-95, the mobile station is required to monitor the Forward Traffic Channel performance during a call. When the mobile station receives twelve (N_{2m}) consecutive bad frames, the mobile station is required to disable its transmitter so that it will not jam the reverse link. Thereafter, if
5 the mobile station receives two (N_{3m}) consecutive good frames, it should re-enable its transmitter. The mobile station also maintains a fade timer. The fade timer is first enabled when the mobile station enables its transmitter at the beginning of a call, and it is reset for five (T_{5m}) seconds whenever two (N_{3m}) consecutive good frames are received on the Forward Traffic Channel.
10 If the fade timer expires, the mobile station disables its transmitter and declares a loss of the Forward Traffic Channel and terminates the call.

The International Telecommunications Union recently requested the submission of proposed methods for providing high rate data and high-quality speech services over wireless communication channels. A first of
15 these proposals was issued by the Telecommunications Industry Association, entitled "The cdma2000 ITU-R RTT Candidate Submission" (hereafter cdma2000). In cdma2000, the equivalents of the Forward Traffic Channel in IS-95 are the Forward Fundamental Channel (F-FCH) and the Forward Dedicated Control Channel (F-DCCH). The data frames
20 transmitted on these channels can be either 20 ms or 5 ms in duration. For F-FCH, a frame (20 or 5 ms) is transmitted in every 20 ms interval aligned to the beginning of the CDMA System Time. For F-DCCH, the transmission can be discontinuous, such that there may not be any data frame transmitted in a 20 ms interval aligned to the CDMA System Time.

25 The use of code division multiple access (CDMA) modulation techniques is one of several techniques for facilitating communications in which a large number of system users are present. Other multiple access communication system techniques, such as time division multiple access (TDMA) and frequency division multiple access (FDMA) are known in the
30 art. However, the spread spectrum modulation technique of CDMA has significant advantages over these modulation techniques for multiple access communication systems. The use of CDMA techniques in multiple access

communication systems is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS," and U.S. Patent No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL
5 WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM," both of which are assigned to the assignee of the present invention and incorporated by reference herein.

CDMA by its inherent nature of being a wideband signal offers a form of frequency diversity by spreading the signal energy over a wide bandwidth.
10 Therefore, frequency selective fading affects only a small part of the CDMA signal bandwidth. Space or path diversity is obtained by providing multiple signal paths through simultaneous links from a mobile user through two or more cell-sites. Furthermore, path diversity may be obtained by exploiting the multipath environment through spread spectrum processing by
15 allowing a signal arriving with different propagation delays to be received and processed separately. Examples of path diversity are illustrated in U.S. Patent No. 5,101,501 entitled "METHOD AND SYSTEM FOR PROVIDING A SOFT HANDOFF IN COMMUNICATIONS IN A CDMA CELLULAR TELEPHONE SYSTEM," and U.S. Patent No. 5,109,390 entitled "DIVERSITY
20 RECEIVER IN A CDMA CELLULAR TELEPHONE SYSTEM," both assigned to the assignee of the present invention and incorporated by reference herein.

In a communication system that provides data using a QPSK modulation format, useful information can be obtained by taking the cross
25 product of the I and Q components of the QPSK signal. By knowing the relative phases of the two components, one can determine roughly the velocity of the mobile station in relation to the base station. A description of a circuit for determining the cross product of the I and Q components in a QPSK modulation communication system is disclosed in U.S. Patent No.
30 5,506,865, entitled "PILOT CARRIER DOT PRODUCT CIRCUIT," assigned to the assignee of the present invention, the disclosure of which is incorporated by reference herein.

There has been an increasing demand for wireless communications systems to be able to transmit digital information at high rates. One method for sending high rate digital data from a remote station to a central base station is to allow the remote station to send the data using spread spectrum techniques of CDMA, such as that proposed in U.S. Patent No. 08/886,604, entitled "HIGH DATA RATE CDMA WIRELESS COMMUNICATION SYSTEM," assigned to the assignee of the present invention and incorporated by reference herein.

New methods for supervising the F-DCCH are needed when F-DCCH is in this discontinuous transmission (DTX) mode because the mobile station must now decide whether a received frame is a good frame, a bad frame, or an empty frame (i.e., no transmission), and how to handle the transmission based upon the type of frames received.

SUMMARY OF THE INVENTION

The present invention is a method and apparatus for supervising a dedicated control channel used in a wireless communication system. The invention solves a variety of F-DCCH supervision problems when an empty frame is encountered.

A first embodiment is an improvement upon the methods used in IS-95, where empty frames are simply ignored. The mobile station maintains a counter of consecutive bad frames, COUNT1, a counter of consecutive good frames, COUNT2, and a counter of empty frames, COUNT3. Each of the COUNTs are set to zero at the beginning of a call. For each frame received, the mobile station determines if it is a good frame, a bad frame, or an empty frame. If the received frame is a good frame, COUNT1 and COUNT3 are reset to zero and COUNT2 is incremented by 1. If the received frame is a bad frame, COUNT1 is incremented by one and COUNT2 is reset to zero. If COUNT1 reaches a first threshold value, TH1, the mobile station disables its transmitter. If COUNT2 reaches a second

threshold value, TH2, the mobile station re-enables its transmitter. The mobile station resets its fade timer to X seconds whenever COUNT2 reaches a third threshold value, TH3.

If the received frame is an empty frame, COUNT1 and COUNT2 are unchanged, but COUNT3 is incremented by one. If COUNT3 reaches a fourth threshold value, TH4, the mobile station disables its transmitter. If COUNT3 reaches a fifth threshold value, TH5, the mobile station disables its transmitter, if not already disabled, and declares the Forward Traffic Channel as lost.

In another embodiment, the mobile station uses the received pilot strength (E_c/I_o) of pilots in the Active Set to perform F-DCCH supervision. The method aggregates the E_c/I_o of all pilots in the Active Set and averages them over a designated time interval. If this average aggregated value (AAV) is below a threshold for a specified amount of time, then the mobile station disables its transmitter. If the AAV continues below the threshold for a longer specified period of time, then the mobile station disables its transmitter, if not already disabled, and declares the Forward Traffic Channel as lost.

As readily recognizable to one skilled in the art, the invention also provides a number of advantages and benefits that will become apparent after reviewing the following description of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Some of the features, objects, and advantages of the present invention are set forth in the detailed description below and when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout, and wherein:

FIGURE 1 is a diagram illustrating the elements of a wireless communications system;

FIGURE 2 is a block diagram of the base station of the present invention; and

FIGURE 3 is a block diagram of the remote station of the present invention.

5

DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS

In FIG. 1, base station 2 transmits forward link signals 6 to mobile station 4. Mobile station 4 transmits reverse link signals 8 to base station 2. In the exemplary embodiment, forward link signals 6 and reverse link signals 8 are code division multiple access (CDMA) communications signals as contemplated by the Telecommunications Industry Association in the candidate submission to the International Telecommunications Union (ITU) entitled "The cdma2000 ITU-R RTT Candidate Submission" and which has been further refined in the Interim Standard Draft Text entitled "Proposed Ballot Text for cdma2000 Physical Layer".

Turning to FIG. 2, the elements necessary for the transmission of the F-DCCH on forward link signal 6 and for reception of reverse link signal 8 is illustrated in greater detail. Messages for transmission on the F-DCCH are generated in F-DCCH message generator (DCCH MSG GEN) 100. These messages may include rate scheduling messages, handoff direction messages, and response messages as discussed below. The F-DCCH is a DTX channel that is transmitted when there is a message or messages to be communicated from a base station 2 to the mobile station 4.

A message is provided to F-DCCH processing element 102. F-DCCH processing element 102 performs the necessary pre-processing and encoding of the F-DCCH message and channelizes the message for transmission on the F-DCCH of forward link signal 6. The F-DCCH message is provided to cyclic redundancy check (CRC) and tail bit generator 104. In response, CRC and tail bit generator 104 generates a set of CRC bits in accordance with the bits in the F-DCCH message and appends the CRC bits to the F-DCCH message. CRC and tail bit generator 104 then appends a series of tail bits to

clear the memory of a decoder at the receiver and provides the resulting packet to encoder 106.

In the exemplary embodiment, encoder 106 is a convolutional encoder, the design and implementation of which is well known in the art. However, the present invention is equally applicable to other types of encoders, such as block encoders and turbo encoders. The encoded symbols are provided to interleaver 108. Interleaver 108 reorders the symbols in a predetermined fashion in order to provide time diversity into the transmission of the F-DCCH message. The interleaving operation helps to spread the results of an error burst over the packet in order to improve the performance of the decoder at the receiver. These "error bursts" - bit or symbol errors that occur consecutively - are typical in wireless communications systems.

The interleaved symbols are provided to power control puncturing element 109. Puncturing element 109 receives reverse link power control bits and punctures the power control bits into the interleaved symbol stream. The power control bits are transmitted to mobile station 4 and are used to adjust the transmission energy of reverse link signal 8.

The symbols from puncturing element 109 are provided to de-multiplexer 110 that alternatively outputs the symbols onto different processing paths. The first output of de-multiplexer 110 is provided to spreading element 112a and the next output of de-multiplexer 110 is provided to spreader 112b, and so on. Spreaders 112 spread the de-multiplexed symbols in accordance with an orthogonal spreading function W_{DCCH} . Orthogonal spreading is well known in the art and a preferred embodiment of spreaders 112 is disclosed in the aforementioned U.S. Patent No. 5,103,459. The spread signals are provided to complex PN spreader 116.

In addition to the dedicated control channel, base station 2 transmits a pilot channel to allow remote station 4 to coherently demodulate the received F-DCCH. Pilot symbols, typically an all-ones sequence, are provided to spreading element 114. The pilot symbols are spread in

accordance with orthogonal spreading sequence W_{pilot} which is orthogonal to spreading sequence W_{DCCH} .

The spread signals from spreading elements 112 and 114 are provided to complex PN spreader 116. Complex PN spreader 116 spreads the signals from spreaders 112 and 114 in accordance with two pseudonoise (PN) sequences PN_I and PN_Q . Complex PN spreading is well known in the art and is described in detail in the cdma2000 candidate submission, the IS-2000 draft specification and the aforementioned co-pending U.S. Patent Application Serial No. 08/856,4280. The complex PN spread signal is provided to transmitter (TMTR) 118. TMTR 118 up-converts, amplifies, and filters the spread signals for transmission through antenna 120 as forward link signal 6. In the exemplary embodiment, TMTR 118 modulates the signal in accordance with a QPSK modulation format.

Turning to FIG. 3, forward link signal 6 is received at antenna 200 and provided through duplexer 202 to receiver (RCVR) 204. RCVR 204 down-converts, amplifies, and filters forward link signal 6. RCVR 204 demodulates forward link signal 6 in accordance with a QPSK demodulation format and outputs the in-phase and quadrature-phase signals to complex PN despreader 206. Complex PN despreader 206 despreads the received signal in accordance with the two pseudonoise sequences used to spread the signal (PN_I and PN_Q). The despread complex PN signals are provided to pilot filter 208. Pilot filter 208 further despreads the signal in accordance with the orthogonal spreading sequence W_{pilot} . The despread pilot symbols are provided to E_c/I_o calculator 214 and dot product circuit 216.

The complex PN despread signals are also provided to demodulator 210. Demodulator 210 demodulates the PN despread signals in accordance with the orthogonal spreading code W_{DCCH} . The despread signals are then provided to dot product circuit 216. Dot product circuit 216 computes the dot product of the F-DCCH and the pilot channel. Because both the pilot channel and dedicated control channel traverse the same propagation path they will experience the same phase shifts. By computing the dot product of the pilot and DCCH channels the result is a scalar set of magnitudes with the

channel induced phase ambiguities removed. A preferred implementation of dot product circuit 216 is described in the aforementioned U.S. Patent No. 5,506,865.

The resultant demodulated symbols from dot product circuit 216 are
5 provided to de-interleaver/decoder 218 and empty frame detector 220. De-interleaver/decoder 218 de-interleaves and decodes the F-DCCH message and provides an estimate of the message or a signal indicating the declaration of a bad frame to DCCH control processor 222. There are a number of ways that a bad frame can be detected. A first is to determine
10 whether the CRC when generated locally at remote station 4 check with the decoded CRC bits. A second is to compute the symbol error rate of the received symbols by comparing the received encoded symbols with a set of locally generated re-encoded symbols based on the decoded bits.

The demodulated symbols from dot product circuit 216 are also
15 provided to empty frame detector 220. Empty frame detector 220 computes the signal to noise ratio of the demodulated symbols and compares the measured signal to noise ratio to a threshold. If the signal to noise ratio is below the threshold an empty frame is declared. It should be noted that there are other methods of determining an empty frame, any of which may
20 be employed without leaving the scope of the present invention. A method and apparatus for detecting empty frames is disclosed in co-pending U.S. Patent Application Serial No. 09/150,493, entitled "ENERGY BASED COMMUNICATION RATE DETECTION SYSTEM AND METHOD" assigned to the assignee of the present invention and incorporated by
25 reference herein.

Data frames that are not empty are provided to DCCH control processor 222, which extracts the punctured power control commands and sends a signal to transmitter 232 adjusting the transmission energy of reverse link signal 8 in response. The loss of this power control command
30 stream results in an inability to control the power of reverse link signal 8, which in turn increases the potential for jamming the reverse link.

In a first embodiment of the present invention, the DCCH control processor 222 receives an indication from decoder 218 or detector 220 that a frame is either good, bad, or empty. Three counters: CNT1 224, CNT2 226, and CNT3 227, are initialized to zero at the beginning of a call. If the
5 received frame is a good frame, then CNT1 224 is reset to zero and CNT2 226 is incremented by one. If the received frame is declared a bad frame, then CNT1 224 is incremented and CNT2 226 is reset to zero. If the frame is declared empty then values of CNT1 224 and CNT2 226 remain unchanged, and the value of CNT3 226 is incremented. If the value of CNT1 224 reaches
10 a threshold TH1 then DCCH control processor 222 sends a signal to transmitter 232 disabling the transmitter (i.e., output power is turned off). Thereafter, if the value of CNT2 226 reaches a threshold TH2, then DCCH control processor 222 sends a signal to transmitter 232 re-enabling the transmitter. Similarly, if the value of CNT3 227 reaches a threshold TH4,
15 then DCCH control processor 222 sends a signal to transmitter 232 disabling the transmitter. If the value of CNT3 227 reaches a threshold TH5, then DCCH control processor 222 sends a signal to transmitter 232 disabling the transmitter, if not already disabled, and declares a loss of the Forward Traffic Channel (i.e., terminate the call.)

20 In a second embodiment, base station 2 transmits a frame, referred to herein as a supervisory frame, every N-second interval, if there is no data frame to be transmitted on the F-DCCH at that time. The supervisory frame contains pre-defined bits known to the mobile station and is transmitted at the lowest data rate that has been negotiated between base station 2 and
25 mobile station 4. Referring to FIG. 2, timer 134 tracks the N-second intervals and at the expiration of the interval sends a signal to control processor 132. Control processor 132 determines whether there is a message for transmission and if not provides a signal to message generator 100 to generate a supervisory frame. The supervisory frame is transmitted on the
30 F-DCCH channel as described with respect to other DCCH messages previously. Mobile station 4 then performs F-DCCH supervision on non-empty frames transmitted at such preset time in a way similar to that

defined in IS-95, with potentially different value for various thresholds. Mobile station 4 may also include other non-empty frames received for supervision purpose in addition to these periodic frames. In another embodiment, the mobile station knows that a supervisory frame is
5 transmitted every N-seconds. If a good frame is not received within N-seconds, CNT1 is incremented. This method may be used in conjunction with the first embodiment discussed above.

In a third embodiment, base station 2 transmits a frame, referred to herein as a supervisory frame, whenever the number of consecutive empty
10 frames exceeds a threshold. In a preferred embodiment, the supervisory frame contains pre-defined bits known to the mobile station and is transmitted at the lowest data rate that has been negotiated between base station 2 and mobile station 4. Referring to FIG. 2, control processor 132 tracks the number of consecutive empty frames in accordance with signals
15 from message generator 100. When the number of consecutive empty frames exceeds the threshold values, then control processor sends a signal to issue a supervisory frame to message generator 100 to generate the supervisory frame. The supervisory frame is transmitted on the F-DCCH channel as described with respect to other F-DCCH messages. Mobile station
20 4 then performs F-DCCH supervision on all non-empty frames in a way similar to that defined in IS-95, with potentially different value for various thresholds. In another embodiment, control processor 132 tracks the number of consecutive empty frames in a given time interval N. If a good frame is not received within the time interval N, then CNT1 is incremented
25 and the invention proceeds as discussed above.

In a fourth exemplary embodiment, mobile station 4 transmits a request message that requires reply from base station 2 when the number of consecutive empty frames detected exceeds a threshold. The reply can simply be an acknowledgement that the request message was received.
30 Referring to FIG. 3, control processor 222 receives an indication as whether a frame is empty from empty frame detector 220. In this embodiment, counter 224 tracks the number of consecutive empty frame and is reset

when a bad frame or good frame is detected. When the count of consecutive empty frames exceeds a threshold, control processor 222 sends a signal to message generator (MSG GEN) 228, which in response generates the request message. The request message is encoded in encoder 228, modulated in
5 modulator 230, and up-converted, amplified and filtered onto a predetermined channel of reverse link signal 8. The request message can be any existing message that is already defined in the standard, which does not cause any base station action besides sending an acknowledgement. For example, the Power Measurement Report Message. The request message
10 can also be a special message that causes the base station 2 to transmit a supervisory frame on the F-DCCH.

Turning to FIG. 2, the request message is received on antenna 8 and provided to receiver 124 which down-converts, amplifies and filters reverse link signal 8 and provides the received signal to demodulator 126.
15 Demodulator 126 demodulates the signal and decoder 128 decodes the demodulated symbols providing the request message to control processor 132. In response, control processor 132 determines if a message is queued to be transmitted on the F-DCCH and if not sends a signal requesting that message generator 100 generate a message for transmission on the F-DCCH.
20 In the exemplary embodiment, the message generated by generator 100 is simply an acknowledgement of the receipt of the request message from mobile station 4.

The mobile station knows that the base station will reply. Therefore, in another embodiment, if the mobile station does not receive a good frame
25 within an interval of T seconds after the request message is sent, CNT1 is incremented and the invention proceeds as discussed above. In another version, the mobile station contains an acknowledgement counter that counts the number of times the mobile station attempts to transmit the request message. If a response from the base station is not received within K
30 number of attempts, the mobile station disables its transmitter, if it is not already disabled, and declares a loss of the Forward Traffic Channel (i.e., the call is terminated).

In a fifth embodiment, mobile station 4 transmits a request message which requires a reply from base station 2 when the number of empty frames detected within a predetermined number of received frames exceeds
5 a threshold, regardless of whether or not the empty frames are consecutive. Referring to FIG. 3, control processor 222 receives an indication as to whether a frame is empty from empty frame detector 220. Counter 224 tracks the number of empty frames in a moving accumulator fashion. When the count of empty frames in a predetermined number of received
10 frames exceeds a threshold, control processor 222 sends a signal to message generator (MSG GEN) 228, which in response generates a request message. The request message is encoded in encoder 228, modulated in modulator 230, and up-converted, amplified and filtered onto a predetermined channel of reverse link signal 8.

15 Turning to FIG. 2, the request message is received on antenna 8 and provided to receiver 124 which down-converts, amplifies and filters reverse link signal 8 and provides the received signal to demodulator 126. Demodulator 126 demodulates the signal and decoder 128 decodes the demodulated symbols providing the request message to control processor
20 132. In response, control processor 132 determines if a message is queued to be transmitted on the F-DCCH and if not sends a signal requesting that message generator 100 generate a message for transmission on the F-DCCH. In the exemplary embodiment, the message generated by generator 100 is simply an acknowledgement of the receipt of the request message.

25 The mobile station knows that the base station will reply. If a reply is not received within T seconds after sending the message, then CNT1 is incremented. In another embodiment, the mobile station contains an acknowledgement counter that counts the number of times the mobile station attempts to transmit the request message. If a reply is not received
30 after K attempts at sending the message, the mobile station disables its transmitter, if it is not already disabled, and declares a loss of the Forward Traffic Channel (i.e., the call is terminated).

In a sixth embodiment, mobile station 4 uses the received pilot strength (E_c/I_o) of pilots in the Active Set to perform F-DCCH supervision. If the aggregated Active Set pilot E_c/I_o is above a preset threshold, mobile station 4 considers the data, if sent in that frame, will be received correctly --- therefore, a good frame. Otherwise, mobile station 4 considers the frame as bad. A supervision rule with the above definition of good frame and bad frame similar to that specified in IS-95 can then be used, with either the same thresholds or modified ones.

Referring to FIG. 3, the signal to noise ratio (E_c/I_o) of the received pilot symbols is computed in E_c/I_o calculator 214. The E_c/I_o value for the pilot signal of forward link signal 6 is combined with the E_c/I_o value of pilots from other base stations in the Active Set of mobile station 4 to provide an aggregate E_c/I_o . The Active Set of base stations is the set of base stations currently communicating with mobile station 4. The aggregate pilot E_c/I_o is provided to control processor 222 that compares the aggregate E_c/I_o to a threshold value. If the aggregate E_c/I_o exceeds a threshold a good frame is declared and if the aggregate E_c/I_o is less than the threshold a bad frame is declared. This allows mobile station 4 to infer a received frame, if non-empty, is a good frame or a bad frame without decoding the frame. Based on these counts, mobile station 4 will enable or disable transmitter 232 as described previously.

In another embodiment, the aggregated E_c/I_o is averaged over certain specified time intervals. If the average aggregated E_c/I_o is below a threshold TH_x for a first time period (for example, 220 ms), then the mobile station will disable its transmitter. Thereafter, if the average aggregated E_c/I_o is above a threshold Th_y for a second time period (for example, 40 ms), then the mobile station will re-enable its transmitter. However, if the average aggravated pilot E_c/I_o remains below the threshold TH_x for a much longer third time period (for example, 5 seconds), then the mobile station will disable its transmitter, if not already disabled, and declare a loss of the Forward Traffic Channel (i.e., terminate the call.) Although suggested

lengths for the time periods are given, the time periods are adaptive, and may be longer or shorter in duration depending upon the application.

The previous description of the various embodiments is provided to enable any person skilled in the art to make or use the present invention.

- 5 The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent
10 with the principles and novel features disclosed herein.

We claim:

CLAIMS

1. A method for supervising a dedicated control channel
transmitted in a discontinuous transmission (DTX) mode to a mobile
station, comprising:
 - tracking a type of frame received in a transmission, wherein said
frames comprise bad frames, good frames, and empty frames;
 - counting the number of bad frames received (COUNT1), wherein
COUNT1 is incremented if a bad frame is received, reset to zero if a good
frame is received; - disabling a mobile station transmitter if COUNT1 exceeds a first
threshold (TH1);
 - counting the number of good frames received (COUNT2), wherein
COUNT2 is incremented if a good frame is received, and reset to zero if a
bad frame is received;
 - enabling said mobile station transmitter if COUNT2 exceeds a second
threshold (TH2);
 - setting a fade timer if COUNT2 exceeds a third threshold (TH3); - disabling said mobile station transmitter and terminating said
received transmission if said fade timer expires before COUNT1 is reset to
zero;
 - counting the number of empty frames received (COUNT3), wherein
COUNT3 is incremented if an empty frame is received, and reset to zero if a
good frame is received;
 - disabling said mobile station transmitter if COUNT3 exceeds a fourth
threshold (TH4); and
 - terminating said received transmission if COUNT3 exceeds a fifth
threshold (TH5), wherein TH5 is greater than TH4, or upon completion of
said received transmission.

2. The method recited in claim 1, wherein said type of frame
2 received in the transmission includes a supervisory frame transmitted at a
set interval, and wherein said method further comprises increasing
4 COUNT1 if a good frame is not received within said set interval.

3. The method recited in claim 2, wherein said set interval occurs
2 whenever the number of empty frames in a selected interval exceeds a sixth
threshold (TH6).
4

4. The method recited in claim 3, wherein the number of empty
2 frames are continuous empty frames.

5. The method recited in claim 1, further comprising:
2 transmitting from said mobile station to a base station a message
requiring a reply from said base station, said message transmitted when the
4 number of consecutive empty frames detected exceeds a seventh threshold
(TH7); and
6 incrementing COUNT1 if a good frame is not received by said mobile
within a designated time after sending said message.

6. The method recited in claim 1, further comprising:
2 transmitting from said mobile station to a base station K number of
messages requiring a reply from said base station, said K number of
4 messages transmitted when the number of consecutive empty frames
detected exceeds a threshold; and
6 disabling said mobile station transmitter and deeming said received
transmission terminated if no reply to said message is received from said
8 base station.

7. The method recited in claim 1, further comprising:

2 transmitting from said mobile station to a base station a message
requiring a reply from said base station, said message transmitted when the
4 number of consecutive empty frames detected in a given interval exceeds a
threshold; and

6 incrementing COUNT1 if a good frame is not received by said mobile
within a designated time after sending said message.

8. The method recited in claim 1, further comprising:

2 transmitting from said mobile station to a base station K number of
messages requiring a reply from said base station, said K number of
4 messages transmitted when the number of consecutive empty frames
detected in a given interval exceeds a threshold; and

6 disabling said mobile station transmitter and deeming said received
transmission terminated if no reply to said message is received from said
8 base station within a time period.

9. A method for supervising a dedicated control channel
2 transmitted in a discontinuous transmission (DTX) mode to a mobile
station, comprising:

4 receiving a pilot strength measurement for each pilot signal
contained in an active set of base stations;

6 determining an aggregate of said pilot strength measurements;

determining an average for said aggregate over a selected time
8 interval; and

10 disabling a remote station transmitter if said average is below a
threshold for a designated time (T_1).

10. The method recited in claim 9, further comprising deeming
2 said received transmission terminated if said average is below said
threshold for a second designated time (T_2), where $T_2 > T_1$.

11. An apparatus used to supervise a dedicated control channel
2 transmitted operating in a discontinuous transmission (DTX) mode,
comprising:
- 4 transceiver means for transmitting and receiving transmissions;
count means communicatively coupled to said transceiver means for
6 counting a number of bad, good, and empty frames received in a
transmission, wherein said count means is reset when a new transmission
8 is received, and wherein said count means counts the number of bad frames
received (COUNT1), the number of good frames received (COUNT2), and
10 the number of empty frames received (COUNT3), and where said COUNTs
may be incremented when:
- 12 COUNT1 is incremented if a bad frame is received;
COUNT2 is incremented if a good frame is received, and reset
14 to zero if a bad frame is received; and
COUNT3 is incremented if an empty frame is received, and
16 reset to zero if a good frame is received;
a fade timer, wherein said fade timer is set for a designated period if
18 COUNT2 exceeds a third threshold (TH3);
disabling/enabling means for disabling said transceiver, wherein said
20 transceiver is enabled if COUNT2 exceeds a second threshold (TH2), and
wherein said transceiver is disabled if said fade timer expires before
22 COUNT1 is reset to zero, and wherein said transceiver is disabled if
COUNT3 exceeds a fourth threshold (TH4); and
24 terminating means for terminating a transmission, wherein said
transmission is terminated if said fade timer expires before COUNT1 is reset
26 to zero, or if COUNT3 exceeds a fifth threshold (TH5).

12. The apparatus in accordance with claim 11, wherein said
2 apparatus further comprises:
an acknowledgement counter means for counting the number of
4 attempted inquiry messages transmitted to a station from said apparatus,
wherein said inquiry messages requiring a reply from said station; and
6 a timer means for tracking designated time periods.

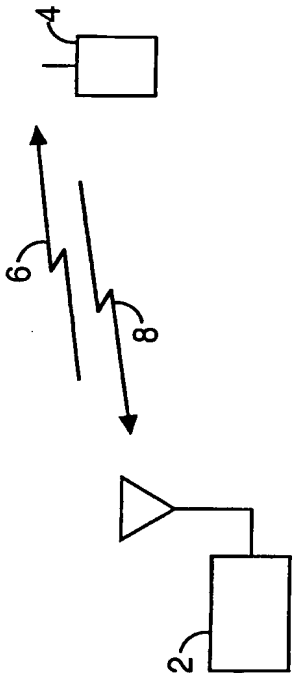


FIG. 1

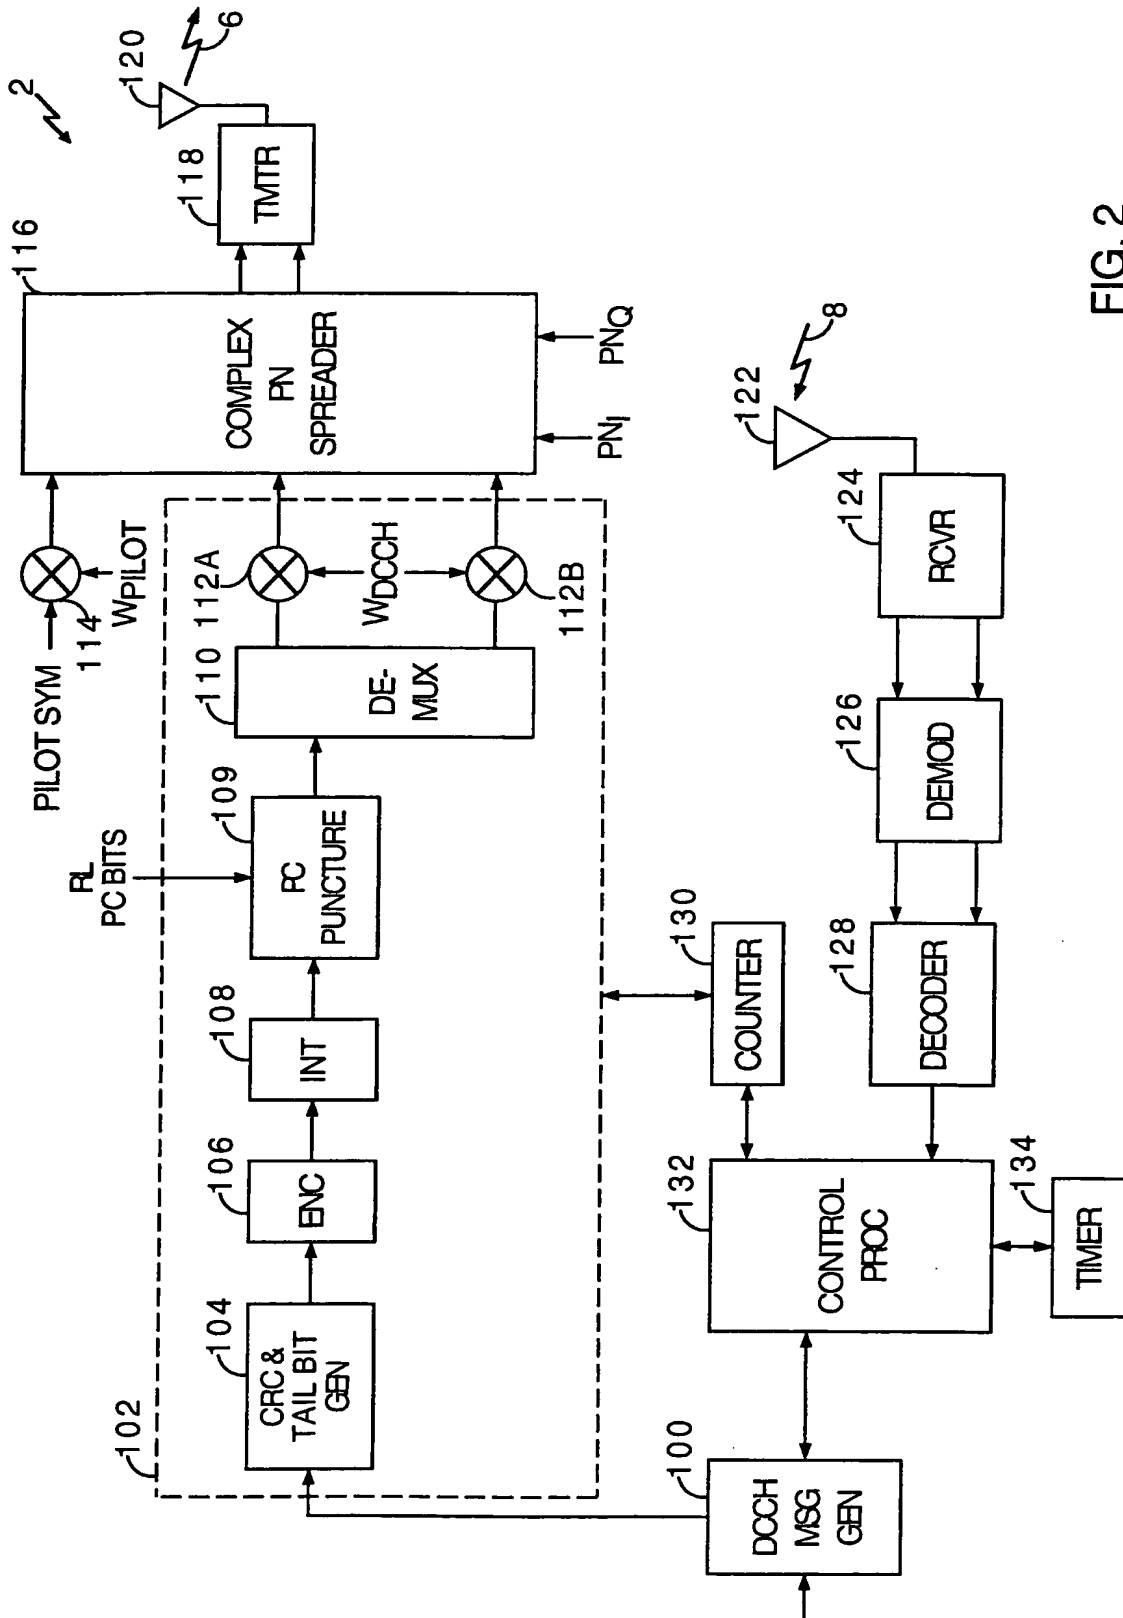


FIG. 2

3/3

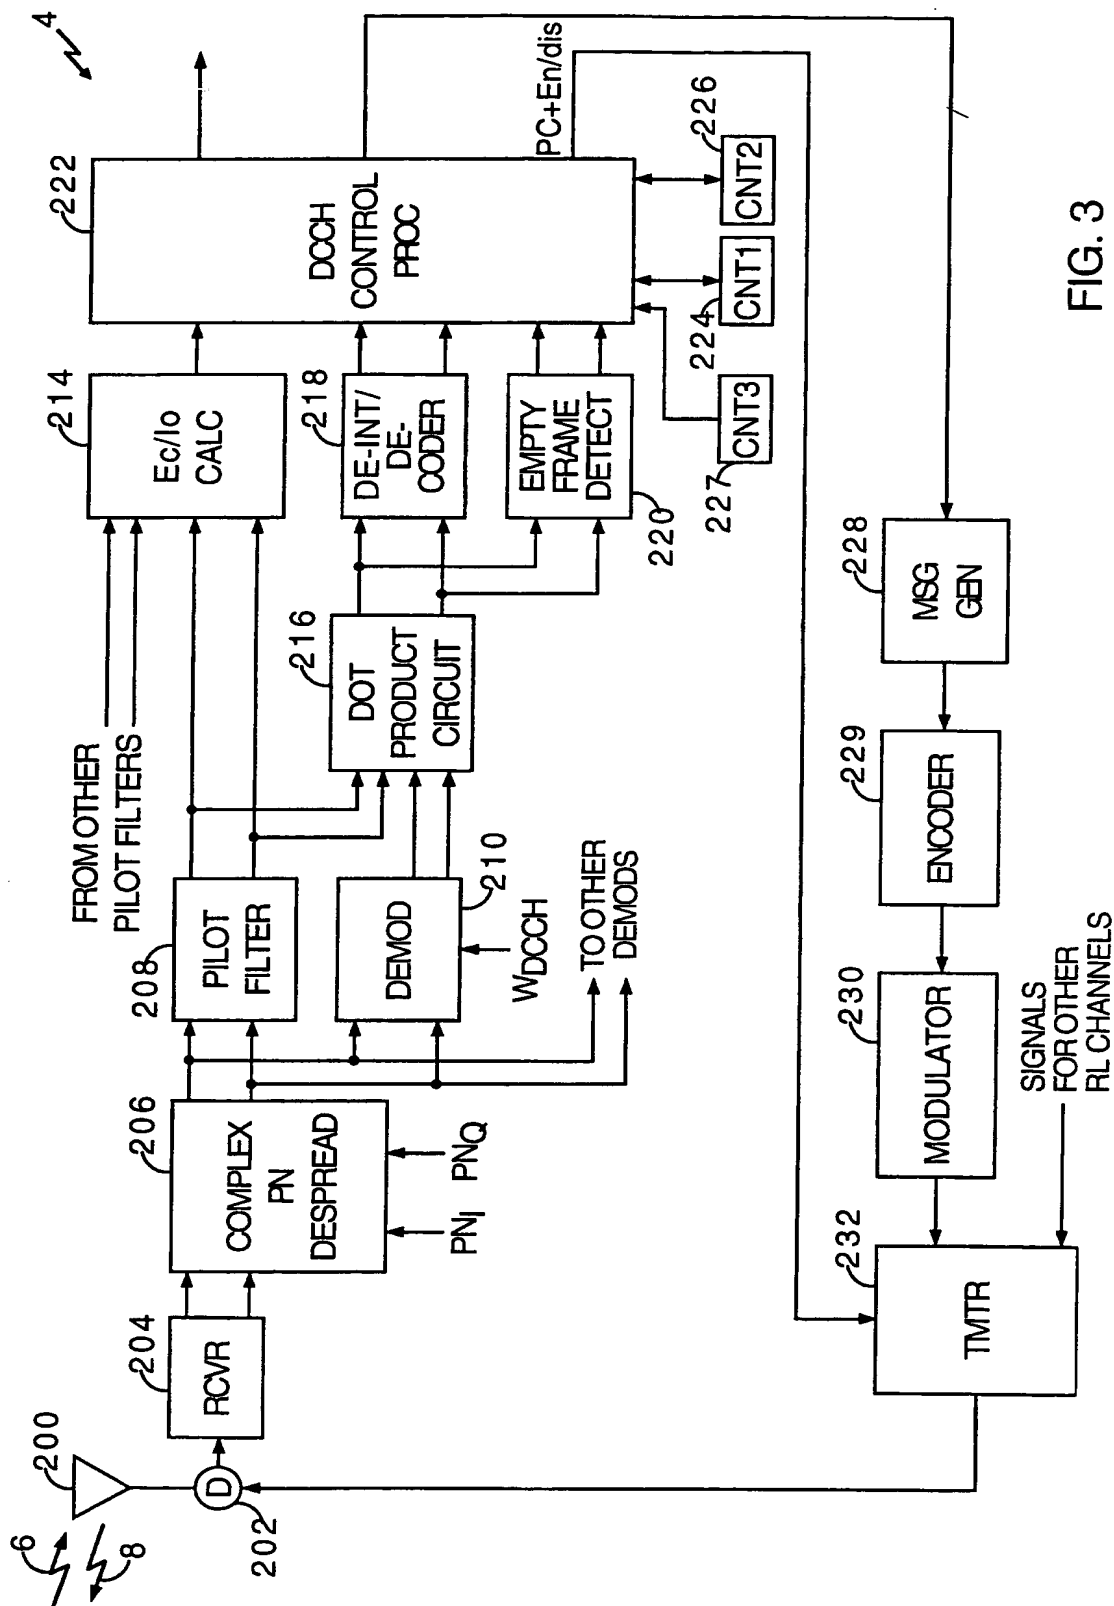


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/19907

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 27745 A (ERICSSON GE MOBILE INC) 3 June 1999 (1999-06-03) the whole document	1-12
A	WO 95 12297 A (QUALCOMM INC) 4 May 1995 (1995-05-04) page 12, line 18 -page 21, line 38	1-12
A	WO 98 21909 A (NOKIA TELECOMMUNICATIONS OY ; RAUTIO LA MARKKU (FI); SILVENTOINEN MA) 22 May 1998 (1998-05-22) claims	1-12
A	WO 96 28809 A (ERICSSON TELEFON AB L M ; HALLKVIST PER (SE); JUNG STEFAN (SE); AND) 19 September 1996 (1996-09-19) page 7, line 21 -page 17, line 10	1-12
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 October 2000

Date of mailing of the international search report

17/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Roberti, V

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/US 00/19907

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 535 429 A (EKLUND ULF C. ET AL) 9 July 1996 (1996-07-09) the whole document	1-12
A	DAHLMAN E ET AL: "UMTS/IMT-2000 BASED ON WIDEBAND CDMA" IEEE COMMUNICATIONS MAGAZINE, US, IEEE SERVICE CENTER, PISCATAWAY, N.J., vol. 36, no. 9, 1 September 1998 (1998-09-01), pages 70-80, XP000784828 ISSN: 0163-6804 the whole document	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/US 00/19907

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9927745 A	03-06-1999	US 6097772 A AU 1535199 A	01-08-2000 15-06-1999
WO 9512297 A	04-05-1995	AU 694460 B AU 8096894 A BR 9407896 A CA 2173484 A CN 1133669 A EP 0722649 A FI 961446 A IL 111434 A JP 9507115 T RU 2120198 C SG 52653 A US 5864760 A ZA 9408133 A	23-07-1998 22-05-1995 19-11-1996 04-05-1995 16-10-1996 24-07-1996 29-05-1996 06-12-1998 15-07-1997 10-10-1998 28-09-1998 26-01-1999 17-05-1996
WO 9821909 A	22-05-1998	AU 7624996 A EP 0956723 A NO 992314 A	03-06-1998 17-11-1999 06-07-1999
WO 9628809 A	19-09-1996	AU 5018196 A EP 0819302 A SE 9500858 A US 6055497 A	02-10-1996 21-01-1998 11-09-1996 25-04-2000
US 5535429 A	09-07-1996	SE 500826 C CN 1095544 A GB 2275389 A, B HK 1002050 A JP 6276143 A SE 9300244 A SG 43742 A	12-09-1994 23-11-1994 24-08-1994 24-07-1998 30-09-1994 28-07-1994 14-11-1997